


Fig. 1

Air Supported Radome (Flexible Membrane)

Seam Configurations

Typical High Strength Fabric Seam Configurations

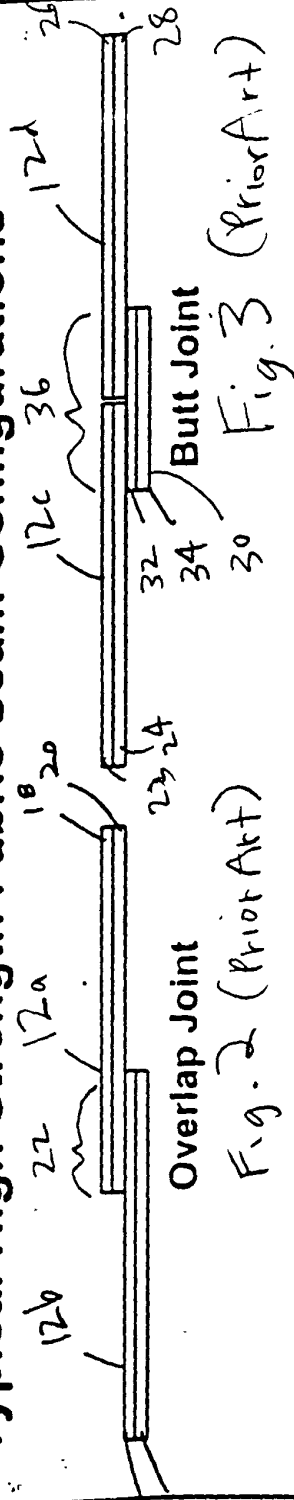


- Based on 'coated fabric' technology.
- Fabric layers directly aligned on top one another.

Proposed Uniform Thickness Seam Configuration



14, 16
b/g

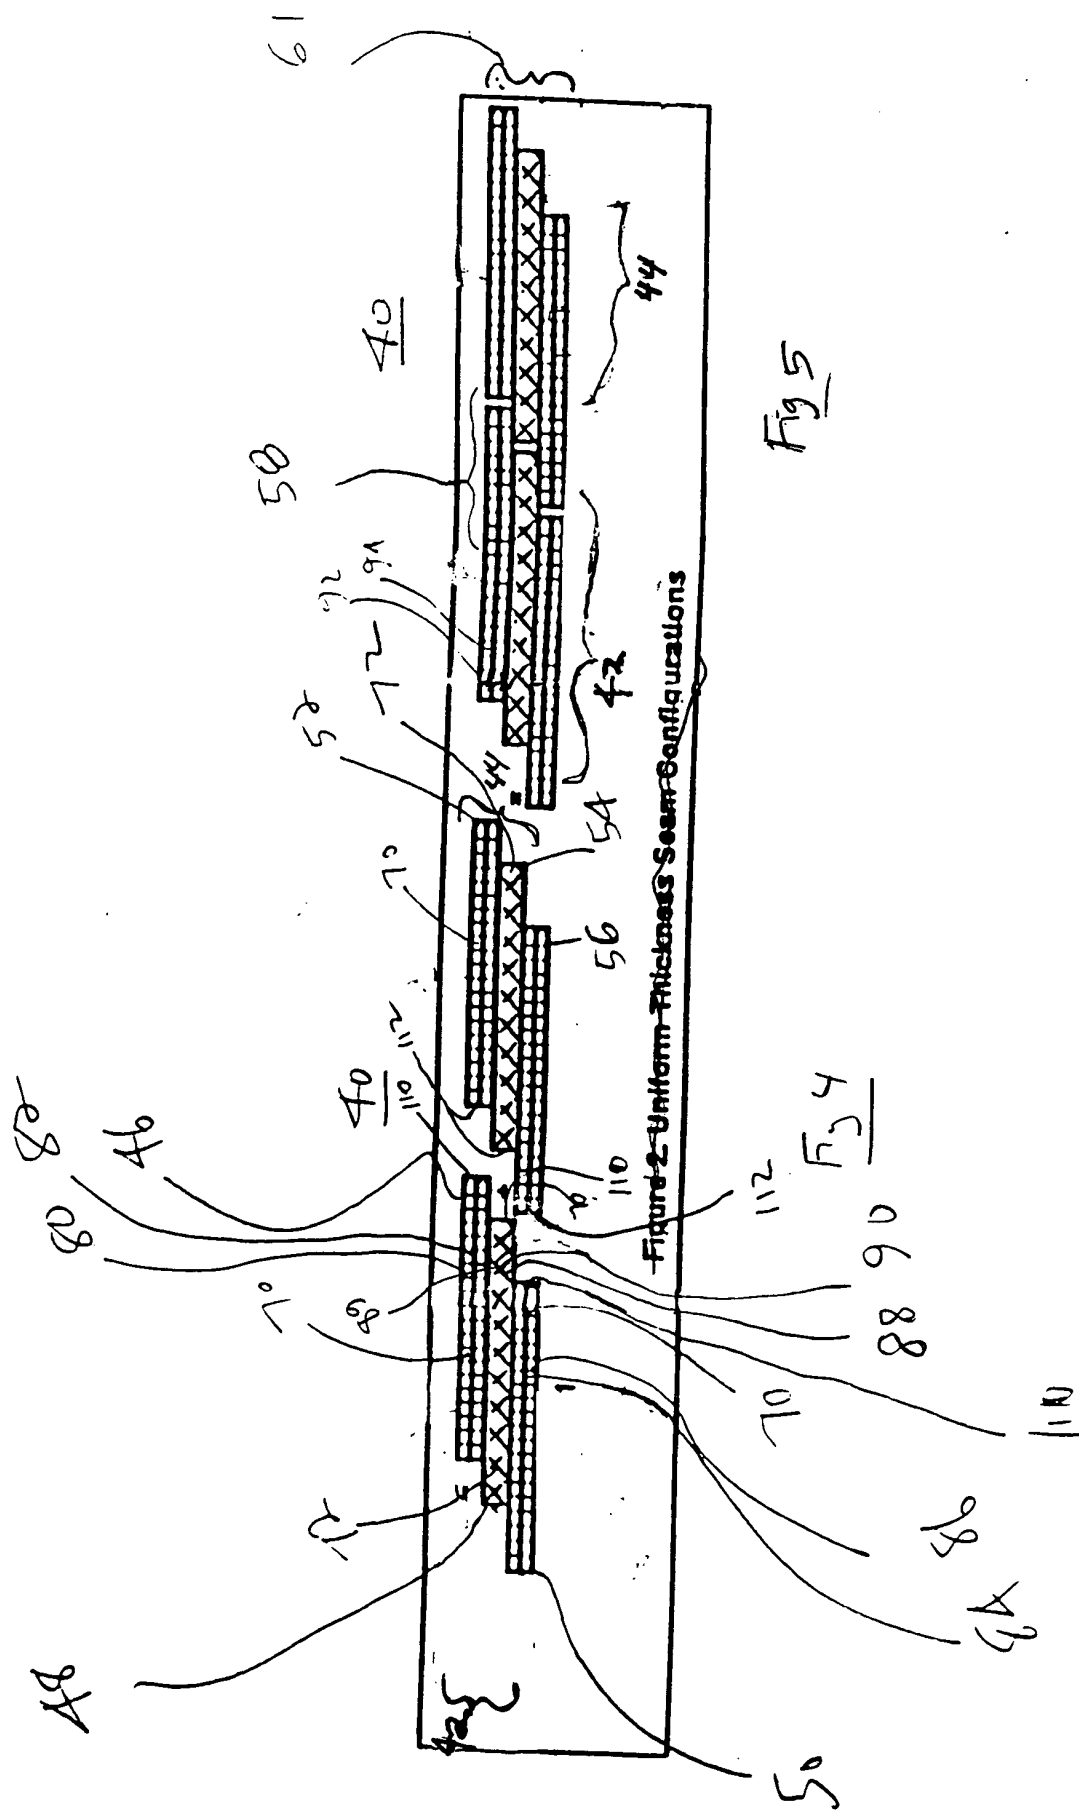

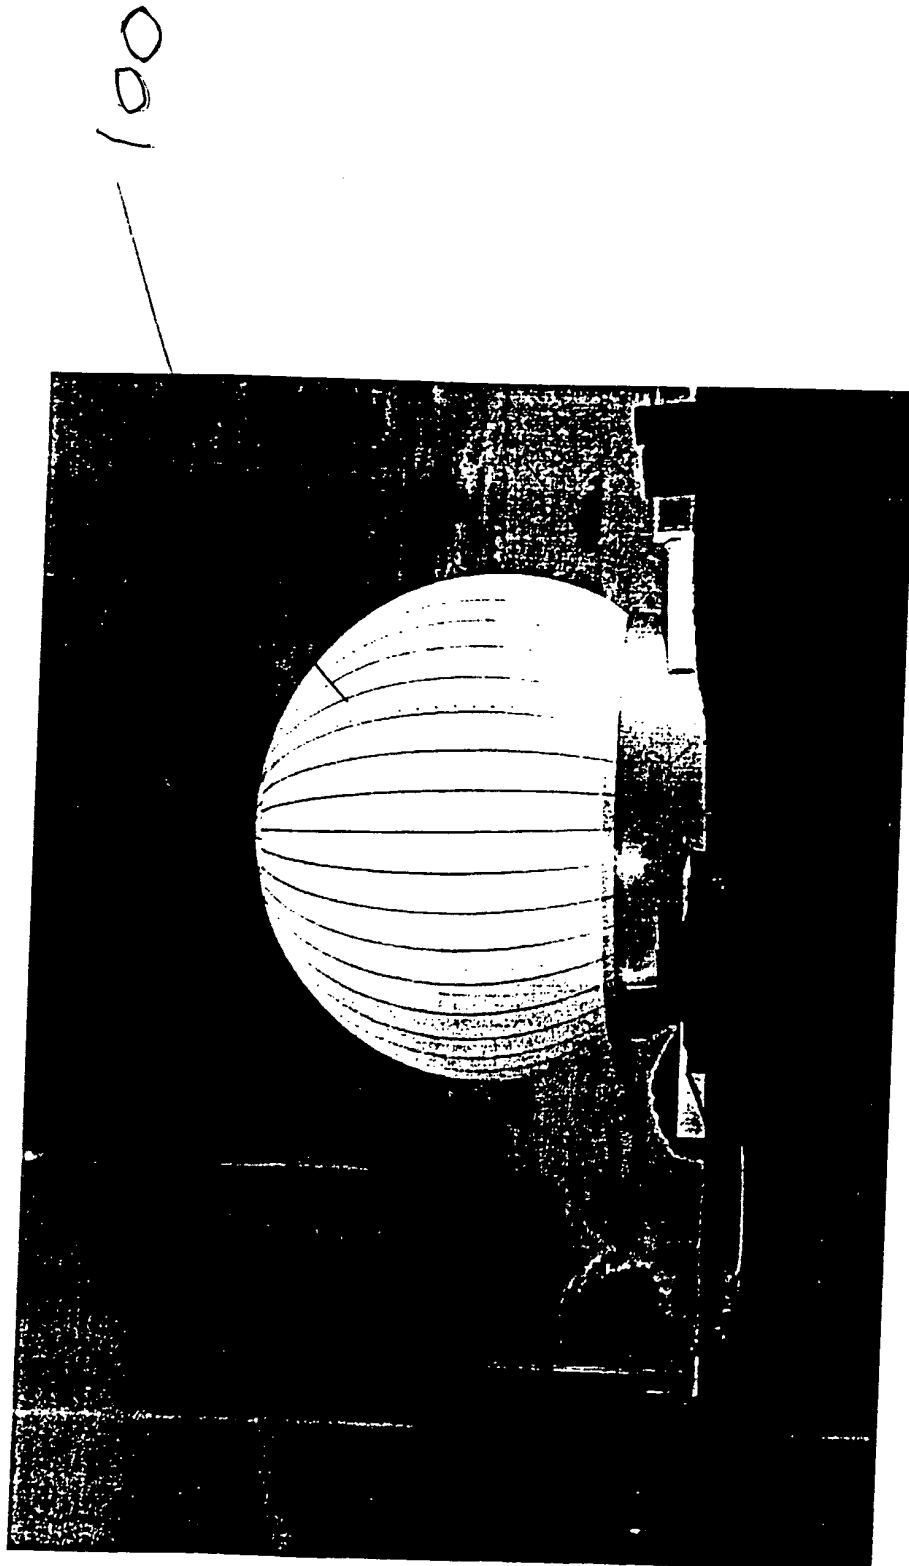


FIG. 6
(Air Supported Radome (Flexible Membrane))